


# WINDOW GUARDS SAFETY SCREENS

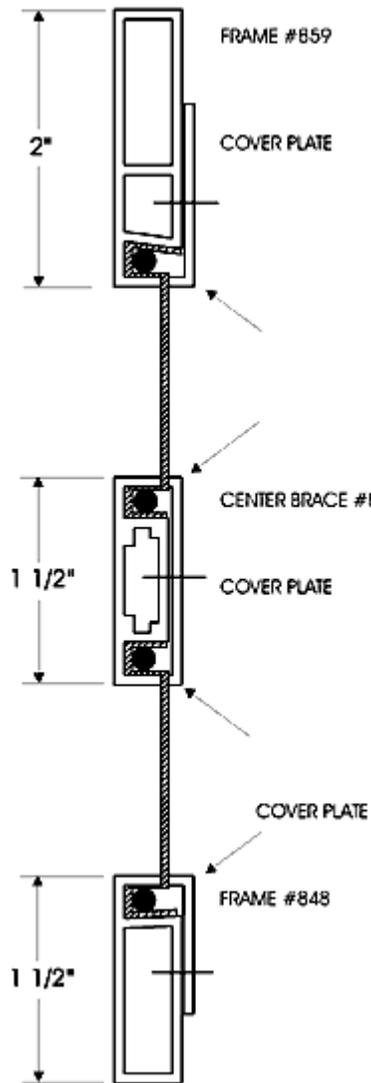

**FOR USE IN HOUSING PROJECTS, HOSPITALS, AND SCHOOLS WHERE RESTRAINT AND ELIMINATION OF GLASS BREAKAGE IS DESIRED THROUGH USE OF STAINLESS STEEL WIRE CLOTH.**

(WILL ALSO ACT AS INSECT BAR)

## **SPECIFICATIONS:**

**MAIN FRAME:** 7/16" X 2" X .062 WALL DOUBLE TUBULAR SECTION OR 7/16" X 1 1/2" X .062 WALL TUBULAR SECTION EXTRUDED OF 6063-T5 ALUMINUM ALLOY

**WIRE CLOTH:** WIRECLOTH SHALL BE STAINLESS STEEL 16 X 16 X .018 WIRE DIA. OR 12 X 12 X .023 WIRE DIA. OR 12 X 12 X .028 WIRE DIA. SECURED IN FRAME WITH VINYL SPLINE. AN ALUMINUM COVERPLATE 1" WIDE X .062" THICK SHALL BE POP-RIVETED TO MAIN FRAME TO COVER SPLINE GROOVE.

**INSTALLATION:** WINDOW GUARDS SHALL HAVE PIANO HINGES AND SURFACE BOLTS OR ATTACHED WITH TAMPER PROOF SCREWS.

**FINISH:** FRAMES TO BE MILL, ANODIZED, DURANODIC HARDCOAT, OR PAINT BAKED ON.

**CORNERS:** CORNERS TO BE MECHANICAL 3" X 3" SOLID ALUMINUM CORNERS OR HELI-ARC WELDED