


TWIN VERTICAL SLIDING SCREENS

FABRICO TWIN VERTICAL SLIDING SCREENS are used extensively in institutional and commercial building applications where ventilation is desired through upper and lower sash. **Screens slide freely** in full height double channel **Extruded Aluminum guides** to allow window cleaning without screen removal. No need to erect scaffolding as **FABRICO Twin Verticals can be installed from the inside** if desired.

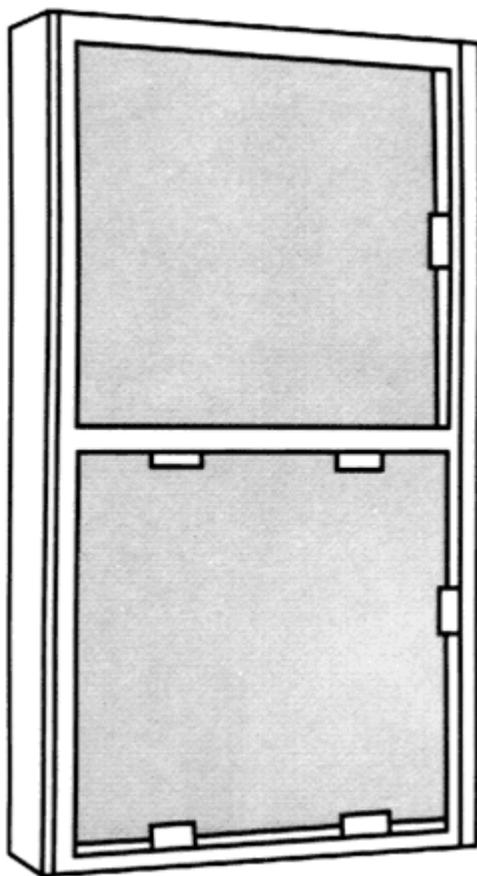

FRAME OPTIONS: 7/16" X 1", 7/16" X 1 ½", 7/16" X 2" All .063" 6063-T5 Extruded Aluminum

GUIDES: Double Track 6063-T5 Extruded Aluminum. One deep guide and one shallow guide permit easy removal. Same guide depth with special spring arrangement also available. Refer to extrusion pages in the catalog for additional guide shapes.

HANDLES: Available in Aluminum or Stainless Steel

HARDWARE: In addition to pull handles, plated steel tension springs and nylon shoes are standard.

SPLINE: Extruded .250 Diameter Virgin Vinyl


MESH: 18 X 16 X .011 Aluminum or 18 X 18 X .009 Stainless Steel or as required

FINISHES: Mill/Anodized/or as required



DEEP TRACK GUIDE #700B




SHALLOW TRACK GUIDE #699




MEETING RAIL



**FRAME # 859
WELDED OR MECHANICAL
CORNERS**

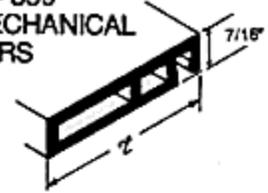

**FRAME #848
MECHANICAL
CORNERS**



**FRAME #586
MECHANICAL
CORNERS**



**FRAME #787
WELDED**



**FRAME #839
WELDED**

